

# ROLLPACKER FRONT INSTALLATION

Installation video available at [www.arkel.ca](http://www.arkel.ca)

## HANGER


**1** Rotate the brackets horizontally.




Feed the hanger under the handlebar.




**2** Rotate brackets back onto the handlebar and secure with velcro.

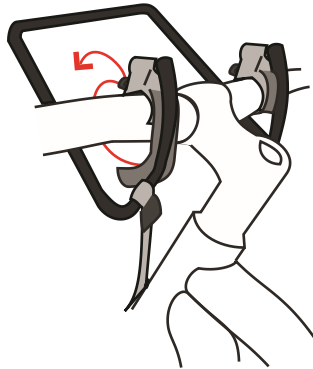


**3** Pass hanger straps(2) under either side of fork crown. Feed the straps through the cam buckles. Tighten and snap closed the cam buckles.

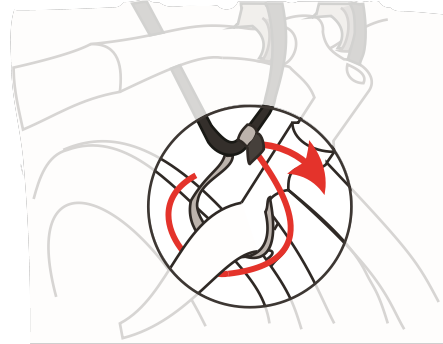

Fold and secure the loose end in the retaining clip.




 Make sure no straps are in contact with the wheel.


If needed, modify the brackets on the hanger for a personalized setup. (see **BRACKETS**)

## BRACKETS


Use M5 hex and 8mm tool to disassemble the brackets.

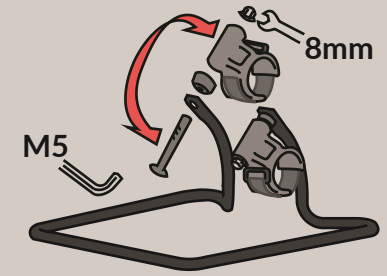


## Possible configurations

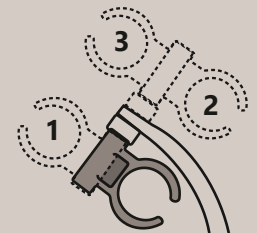

1. Rotate the brackets for a lower bag position.
2. Reassemble the bracket over the hanger arms to clear the handlebar and cables.
3. Reassemble and rotate the brackets for the lowest bag position.

 Make sure you keep a safe distance between the bag and the front wheel, always account for fork travel.

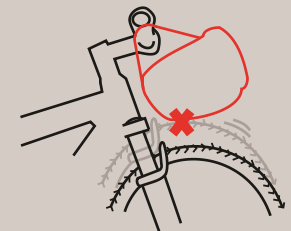

## BAG

**1** Unbuckle the straps and slide the bag on the hanger using the top sleeve.



**2** Pass the straps under the hanger and over the handlebar.



**3** Buckle the straps and adjust tension using cam buckles.

